



Software Engineering
Rochester Institute
of Technology

SWEN-250 Personal SE

Introduction to C



A Bit of History

- Developed in the early to mid 70s
 - Dennis Ritchie as a systems programming language.
 - Adopted by Ken Thompson to write Unix on a the PDP-11.
- At the time:
 - Many programs written in assembly language.
 - Most systems programs (compilers, etc.) in assembly language.
 - Essentially ALL operating systems in assembly language.
- Proof of Concept
 - Even small computers could have an OS in a HLL.
 - Small: 64K bytes, 1 μ s clock, 2 MByte disk.
 - We ran *5 simultaneous users* on this base!



But Efficiency Wasn't Cheap in the 70s

- Compiler development still art as much as science.
- Code optimization in its infancy.
- C as a consequence:
 - Has types (but they can be easily ignored).
 - Has no notion of objects (just arrays and structs).
 - Permits pointers to arbitrary locations in memory (Scout's Honor Programming).
 - Has no garbage collection – it's the programmer's job to manage memory.
- That is, C is the band saw of programming languages:
 - Very powerful and doesn't get in your way.
 - Very dangerous and you can cut off your fingers.



What Java Borrowed From C

- { and } for grouping.
- Prefix type declaration (e.g., int i vs. i : int).
- Control structures (mostly)
 - if, switch
 - while, for
- Arithmetic (numeric) operations:
 - ++ and -- (prefix and suffix)
 - *op*= (e.g. += *=, etc.)
 - + - * / %
- Relational & boolean operators:
 - < > <= >= != ==
 - ! || &&



Things Uniquely C

- Today
 - No classes – just functions & data.
 - Characters are just small integers.
 - No booleans.
 - Limited visibility control via `#include` and separate compilation.
 - Simple manifest constants via `#define`
- Later
 - Array size fixed at compile time.
 - Strings are just constant arrays.
 - Simple data aggregation via structures (**struct**)
 - And, last but not least – POINTERS!!!



Functions & Data

- C functions – like methods free from their class.
- The most important function: main
- Example: Hello, world

```
#include <stdlib.h>
```

```
#include <stdio.h>
```

```
int main( ) {  
    puts( "Hello, world!" );  
    return 0 ;  
}
```



Functions & Data

- C functions – like methods free from their class.
- The most important function: `main`
- Example: Hello, world

Includes interface information to other modules

Similar to `import` in Java

But done textually!!

```
#include <stdlib.h>
#include <stdio.h>
```

```
int main( ) {
    puts( "Hello, world!" );
    return 0 ;
}
```



Functions & Data

- C functions – like methods free from their class.
- The most important function: main
- Example: Hello, world

```
#include <stdlib.h>  
#include <stdio.h>
```

stdlib

atoi, atol, atof
memory allocation
abort, exit, system, atexit
qsort, bsearch [advanced]

```
int main( ) {  
    puts( "Hello, world!" );  
    return 0 ;  
}
```




Functions & Data

- C functions – like methods free from their class.
- The most important function: main
- Example: Hello, world

```
#include <stdlib.h>  
#include <stdio.h>
```

stdio
getchar, fgetc, putchar, fputc
printf, fprintf, sprintf
gets, puts, fgets, fputs
scanf, fscanf, sscanf

```
int main( ) {  
    puts( "Hello, world!" );  
    return 0 ;  
}
```



Functions & Data

- C functions – like methods free from their class.
- The most important function: main
- Example: Hello, world

```
#include <stdlib.h>  
#include <stdio.h>
```

```
int main( ) {  
    puts( "Hello, world!" );  
    return 0 ;  
}
```

Every C program has a **main** function – the first function called.

main returns exit status.

0 = ok

anything else = abnormal.



Functions & Data

- C functions – like methods free from their class.
- The most important function: main
- Example: Hello, world

```
#include <stdlib.h>  
#include <stdio.h>
```

```
int main( ) {  
    puts( "Hello, world!" );  
    return 0 ;  
}
```

puts, from **stdio**, prints a string and appends a newline ('\n').

Strings are simpler in C than Java.

C strings are just constant arrays.



Characters are Small Integers

- Consider the following C constants"

'a' 97 0141 0x61

- In C they are all the same value – a small positive int.
- That is, character constants are just small integers.
 - Use the notation that expresses what you are doing:
 - If working with numbers, use 97 (or 0141 / 0x61 if bit twiddling).
 - If working with letters, use 'a'.
 - Question: what is 'a' + 3?
 - Question: if ch holds a lower case letter, what is ch - 'a'?
- **Escape sequences with backslash:**
 - '\n' == newline, '\t' == tab, '\r' == carriage return
 - '\ddd' == character with octal code *ddd* (the *d*'s are digits 0-7).
 - '\0' == NUL character (end of string in C).



Another Example – Count Punctuation

Software Engineering
Rochester Institute
of Technology

```
#include <stdlib.h>
#include <stdio.h>
#include <ctype.h>

int main( ) {
    int tot_punct = 0 ; // declare & init. a local variable
    int nchar ;        // next character read

    while( (nchar = getchar()) != EOF ) {
        if( ispunct(nchar) ) {
            ++tot_punct ;
        }
    }

    printf( "%d punctuation characters\n", tot_punct ) ;
    return 0 ;
}
```



Integer Types in C

- char
- unsigned char
- short
- unsigned short
- int
- unsigned int = unsigned
- long
- unsigned long
- long long
- unsigned long long

one byte = 8 bits - possibly signed

one byte unsigned

two bytes = 16 bits signed

two bytes unsigned

"natural" sized integer, signed

"natural" sized integer, unsigned

four bytes = 32 bits, signed

four bytes, unsigned

eight bytes = 64 bits, signed

eight bytes, unsigned



Another Example – Count

Punctuation

ctype

isalnum, isalpha, isdigit, iscntrl
islower, isupper, ispunct, isspace
isxdigit, isprint
toupper, tolower

```
#include <stdlib.h>
#include <stdio.h>
#include <ctype.h>
```

```
int main( ) {
    int tot_punct = 0 ; // declare & init. a local variable
    int nchar ;        // next character read

    while( (nchar = getchar()) != EOF ) {
        if( ispunct(nchar) ) {
            ++tot_punct ;
        }
    }

    printf( "%d punctuation characters\n", tot_punct ) ;
    return 0 ;
}
```



Another Example – Count

Punctuation

```
#include <stdlib.h>
#include <stdio.h>
#include <ctype.h>
```

```
int main( ) {
    int tot_punct = 0, // declare & init. a local variable
    int nchar ;       // next character read
```

```
    while( (nchar = getchar()) != EOF ) {
        if( ispunct(nchar) ) {
            ++tot_punct ;
        }
    }
```

```
    printf( "%d punctuation characters\n", tot_punct ) ;
    return 0 ;
```

```
}
```

Next character from standard in.
Why **int** and not **char**?
Because EOF is negative!



Another Example – Count

Punctuation

Software Engineering
Rochester Institute
of Technology

```
#include <stdlib.h>
#include <stdio.h>
#include <ctype.h>
```

```
int main( ) {
    int tot_punct = 0 ; // declare & init. a local variable
    int nchar ;        // next character read
```

```
while( (nchar = getchar()) != EOF ) {
    if( ispunct(nchar) ) {
        ++tot_punct ;
    }
}
```

```
printf( "%d punctuation characters\n", tot_punct ) ;
return 0 ;
```

```
}
```

Common C idiom:

Get & assign value

Compare to control flow

= vs. == can kill you here.



Another Example – Count

Punctuation

```
#include <stdlib.h>
#include <stdio.h>
#include <ctype.h>

int main( ) {
    int tot_punct = 0 ; // declare & initialize a local variable
    int nchar ;        // next character read

    while( (nchar = getchar()) != EOF ) {
        if( ispunct(nchar) ) {
            ++tot_punct ;
        }
    }

    printf( "%d punctuation characters\n", tot_punct ) ;
    return 0 ;
}
```

EOF defined in **stdio.h** as (-1)
Not a legal character.
Signals end-of-file on read.



Another Example – Count

Punctuation

Helper function from **ctype**
True iff nchar is punctuation.

```
#include <stdlib.h>
#include <stdio.h>
#include <ctype.h>

int main( ) {
    int tot_punct = 0 ; // declare & init. a local variable
    int nchar ;        // next character read

    while( (nchar = getchar()) != EOF ) {
        if( ispunct(nchar) ) {
            ++tot_punct ;
        }
    }

    printf( "%d punctuation characters\n", tot_punct ) ;
    return 0 ;
}
```



Another Example – Count

Software Engineering
Rochester Institute
of Technology

```
#include <stdlib.h>
#include <stdio.h>
#include <ctype.h>
```

Formatted output to standard out.
printf = print formatted
1st argument is format string
Remaining arguments are printed
according to the format.

```
int main( ) {
    int tot_punct = 0 ; // declare & init. a local variable
    int nchar ;        // n = next character read

    while( (nchar = getch( )) != EOF ) {
        if( ispunct(nchar) ) {
            ++tot_punct ;
        }
    }

    printf( "%d punctuation characters\n", tot_punct ) ;
    return 0 ;
}
```



Short Digression on Printf

- Format string printed as is except when encounters '%'
 - %d print integer as decimal
 - %f print floating point (fixed point notation)
 - %e print floating point (exponential notation)
 - %s print a string
 - %c print integer as a character
 - %o / %x print integer as octal / hexadecimal
- Format modifiers - examples
 - %*n*.*m*f at least *n* character field with *m* fractional digits
 - %*n*d at least *n* character field for a decimal value.
- Example:

```
printf("%d loans at %5.2f%% interest\n",nloans, pct) ;
```
- See the `stdio.h` documentation for more on format control.



Boolean = Integer

- There is no boolean type in C.
- 0 is **false**, everything else is **true**.
 - False: 0 0.0 '\0' NULL (0 pointer).
 - True: 1 'a' 3.14159
- The result of a comparison operator is 0 or 1.
- Many programmers define symbolic constants:


```
#define TRUE (1)
#define FALSE (0)
```
- Pet Peeve:

BAD

```
if ( value < limit ) {
    return TRUE ;
} else {
    return FALSE ;
}
```


GOOD

```
return value < limit ;
```



Compilation

- Our systems use the GNU C compiler (gcc)
- The compilation process with two files (main.c, foo.c)
`gcc -o myprog main.c foo.c`

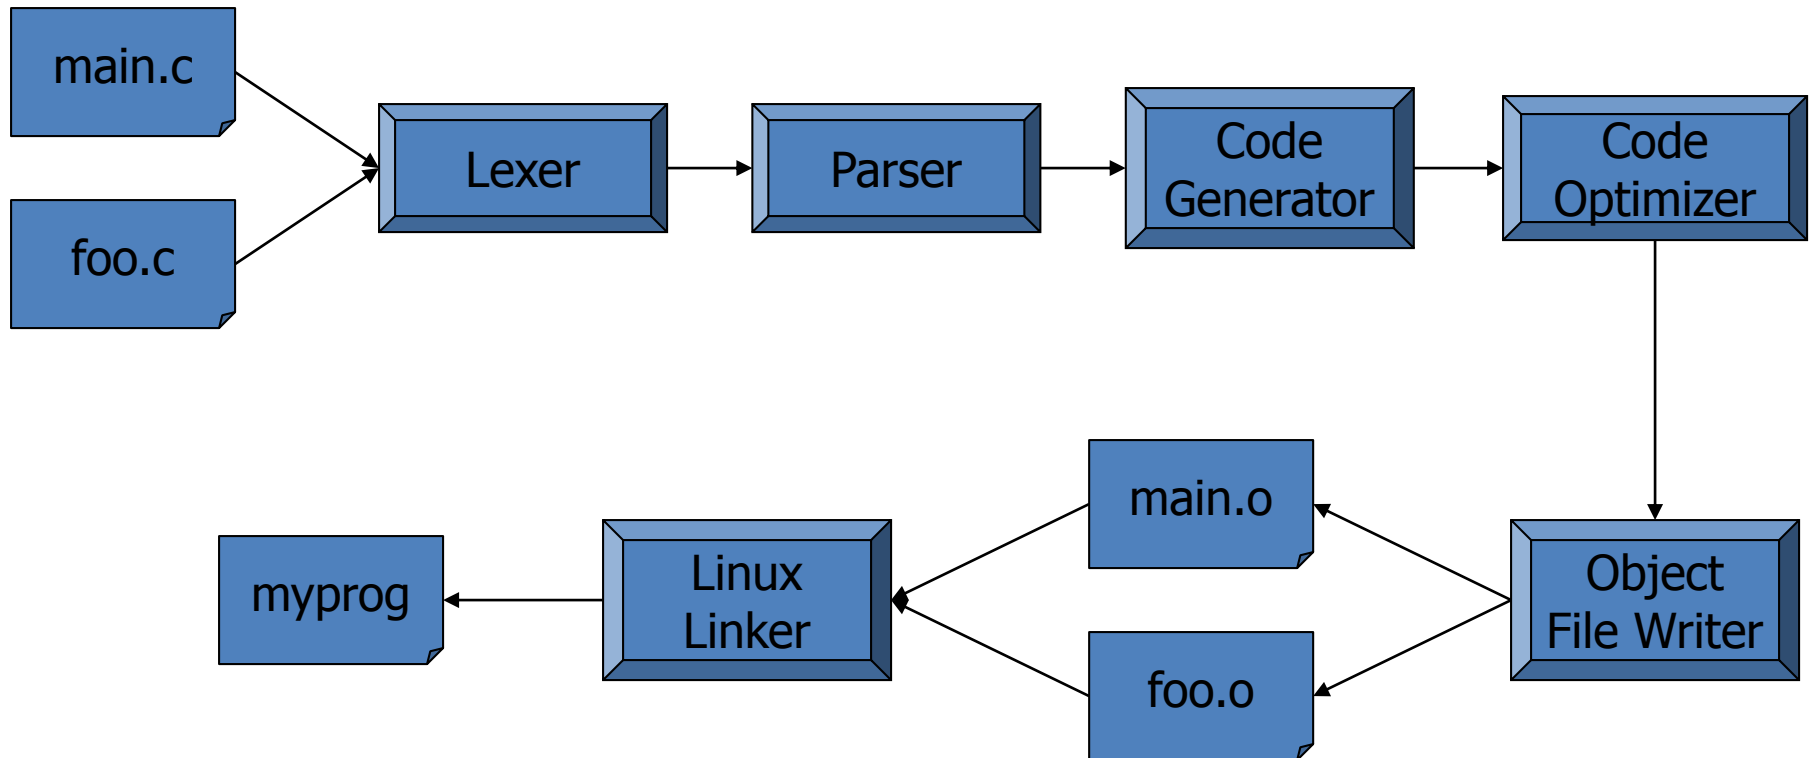



Compilation

- Problems can occur all along the line:
 - Unterminated comments can throw off the lexer.
 - Syntax errors are detected by the parser.
 - The code generator / optimizer can generate bad code (highly unlikely).
 - The linker may not be able to resolve all the external references.
- Notes on linking:
 - Every object file has a table of contents.
 - Some of the names are defined in the file (e.g., main).
 - Some are needed from another file (e.g., printf).
 - The linker tries to resolve these BUT:
 - It may not be able to find a symbol it needs (missing file?)
 - It may find two definitions of a symbol (name conflict).